



Range:

Indirect Light Module Dropped Perforated Basket

Mounting:

Recessed with Side Arm Supports
Exposed or Concealed Grid Ceiling

Construction:

Sheet Steel-Powder Coated RAL9010

Controls:




High Frequency	- Standard
DALI	- DL
DSI	- DS
Analogue 0-10	- 010
Integral Emergency	- EM

Optics:

Micro-Perforated Basket Involute Reflectors

Distribution:

ILM-DB.155

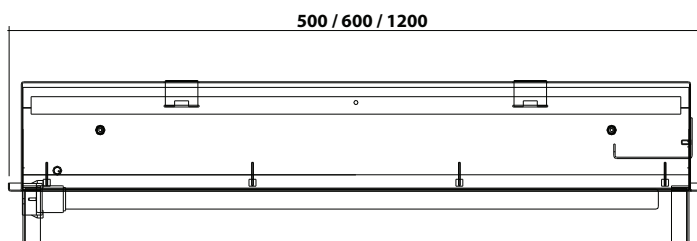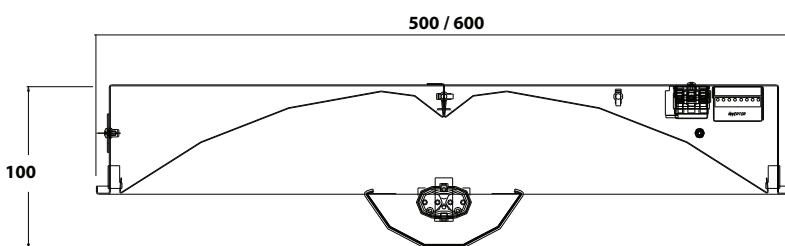

Efficiency:

DLOR	- Louvre 56%
SHR NOM	- 1.65
SHR MAX	- 1.91
SHR TMAX	- 2.1

Classification:

Micro-Perforated 1000cd < 65 deg

Options:

500 x 500 Modules	24w/36w PLL 1 or 2 Lamp
600 x 600 Modules	40w/55w PLL 1 or 2 Lamp
1200 x 600 Modules	28w/54w T5 2 or 4 Lamp