



### Range:

Indirect Light Module Flush Perforated Basket

### Mounting:

Recessed with Side Arm Supports  
Exposed or Concealed Grid Ceiling

### Construction:

Sheet Steel-Powder Coated RAL 9010

### Controls:




High Frequency	- Standard
DALI	- DL
DSI	- DS
Analogue 0-10	- 010
Integral Emergency	- EM

### Optics:

Micro-Perforated Basket Involute Reflectors

### Distribution:

ILM-FPB.155

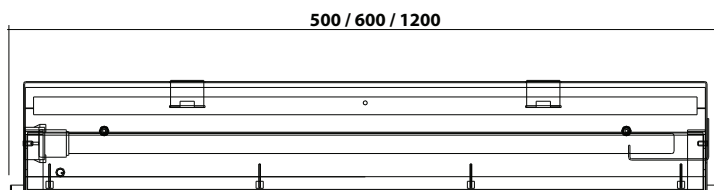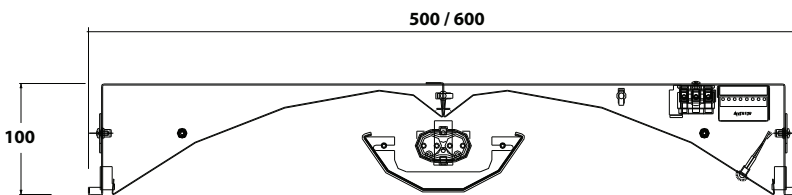

### Efficiency:

DLOR	- Louvre 52%
SHR NOM	- 1.62
SHR MAX	- 1.73
SHR TMAX	- 2.07

### Classification:

Micro-Perforated 1000cd < 65 deg

### Options:

500 x 500 Modules	24w/36w PLL 1 or 2 Lamp
600 x 600 Modules	40w/55w PLL 1 or 2 Lamp
1200 x 600 Modules	28w/54w T5 2 or 4 Lamp