


LED651



LED652



LED643

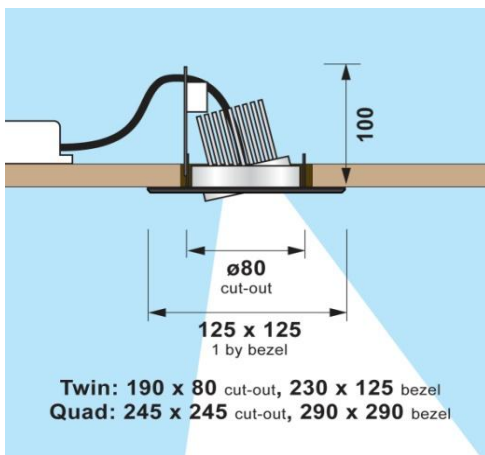

Range:

LED Recessed Downlight

50,000 hr life to 70% lumen maintenance

Mounting:

Recessed - 100mm high

Construction:

Solid Aluminium

Passive Thermal Management

Controls:

Electronic - Standard 350mA

DALI - DL

Analogue 1-10V - 1-10V

Mains Dimming - MD

Emergency 3hr. - EM

Optics:

7x high performance CREE XP-E diodes per head

Wattgae/ beam°/ Lumen Package/ Colour Temp & Ra:

7W	24°	535lm	3000°k Ra 80	per head
7W	24°	580lm	4000°k Ra 80	per head
7W	54°	535lm	3000°k Ra 80	per head
7W	54°	580lm	4000°k Ra 80	per head

Options:

White Bezel - WH

Piano Black - BK