




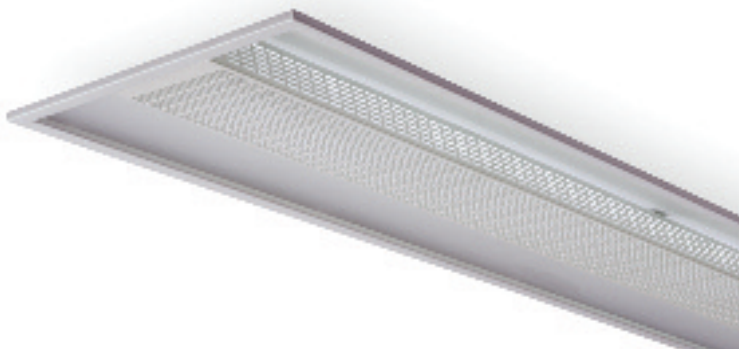

R5iEL

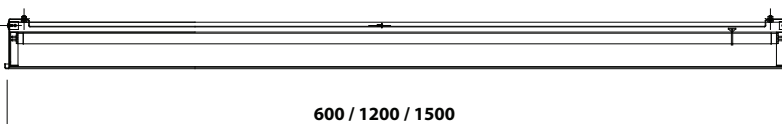

R5iEP

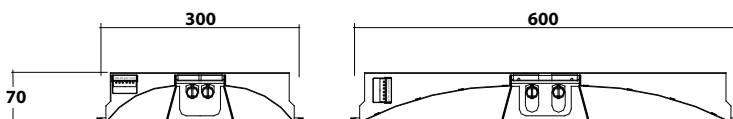

Range:

Recessed Indirect Exposed Louvre/ Exposed Panel

Mounting:

Recessed with Side Arm Supports
Exposed or Concealed Ceiling

Construction:

Sheet Steel-Powder Coated RAL9010

Controls:


High Frequency	- Standard
DALI	- DL
DSI	- DS
Analogue 0-10	- 010
Integral Emergency	- EM

Optics:

Involute Reflector	
Specular-Louvre	- SL
Semi-Specular Louvre	- SSL
Perforated Panel	- PP

Distribution:

R5iEL.154

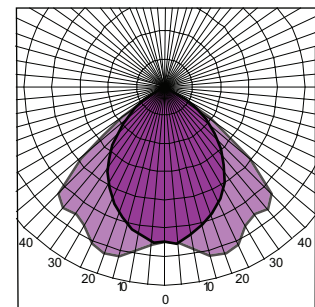

Efficiency:

DLOR	- Louvre 60%
SHR NOM	- 1.25
SHR MAX	- 1.33
SHR TMAX	- 1.46

Classification:

Specular Louvre 500cd < 65 deg

Options:

600 x 600 Modules	14w/24w T5 1 or 2 Lamp
1200 x 600 Modules	28w/54w T5 1 or 2 Lamp
1200 x 300 Modules	28w/54w T5 1 or 2 Lamp
1500 x 300 Modules	35w/49w T5 1 or 2 Lamp