


Standard Housing

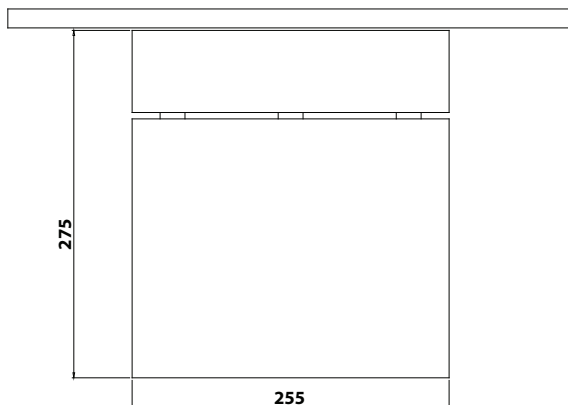

Emergency Housing

Range:

Surface Downlighter Horizontal Lamp

Mounting:

Surface

Construction:

Spun Aluminium

Controls:


High Frequency	- Standard
DALI	- DL
DSI	- DS
Analogue 0-10	- 010
Remote Emergency	- REM

Optics:

Specular Plain Reflector	- PR
Diamond Facet Reflector	- DF
Satin Reflector	- SR

Distribution:

SDH.SR.2026

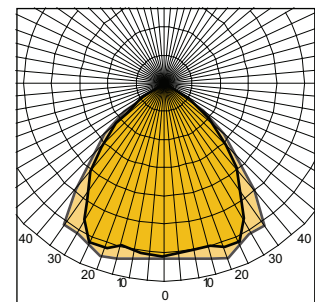

Efficiency:

DLOR	- 50%
SHR NOM	- 2.00
SHR MAX	- 2.03

Classification:

Satin Reflector 1500cd < 65 deg

Options:

255mm Diameter Single lamp 26w,32w,42w PLT

255mm Diameter Twin Lamp 26w,32w,42w PLT