


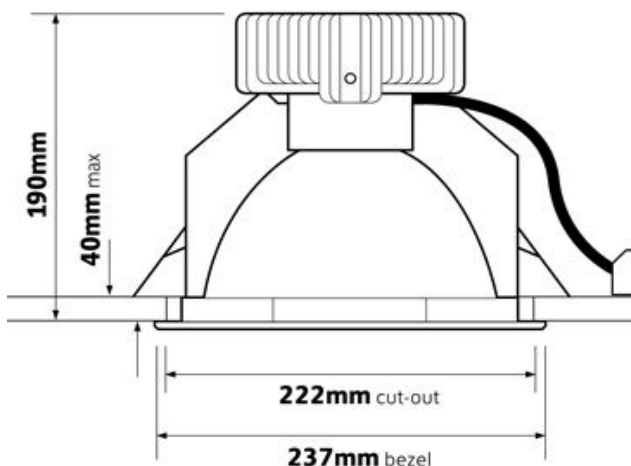

Overview:

The RLED3.100 range is a large circular LED recessed downlight, fitted with a satin etched reflector.

Range:

Powered by Philips DLM Flex light engine.
Finished in white.
Dimming options.
Emergency options.
Two colour temps: 3000K & 4000K
Range of accessories to suit.

Mounting:

Recessed, Weight 1.3kg
Ceiling depth - max. 40mm
Diameter - 237mm

Construction:

Bezel die-cast aluminium

Controls:

Electronic	- Standard
touchDIM, DALI	- DALI
Emergency 3hr	- EM

Efficiency:

Optical efficiency (DLOR)	92%
---------------------------	-----

Model Ref / Wattage / Lumen package / Colour temp

RLED3.100.1100.40	14.9W	1237lm	4000K
RLED3.100.2000.40	24.9W	2117lm	4000K
RLED3.100.3000.40	33.7W	3078lm	4000K
RLED3.100.5000.40	48.6W	4329lm	4000K
RLED3.100.1100.30	14.8W	1133lm	3000K
RLED3.100.2000.30	24.9W	1935lm	3000K
RLED3.100.3000.30	33.7W	2820lm	3000K
RLED3.100.5000.30	48.6W	3966lm	3000K

*Nuventix active cooling