

Overview:

The SL38S suspended slotlight range is available in various lengths that can be connected to form a highly versatile system, corners and T' sections can be incorporated.



Range:

The luminaire system can be used to create one continuous line of light.

Infill sections are available in lengths and colours to suit your individual requirements.

Powered by Helvar light engines.

Provided with a TPA rated high output satine optic, sealed to IP40.

Dimming option.

Emergency option.

Two colour temps: 3000K & 4000K

Mounting:

Suspended - Provided with 2 metre wire suspensions as standard.

Construction:


Extruded aluminium

Controls:

Electronic	- ELEC
DSI	- DSI
DALI	- DALI

Efficiency:

Optical efficiency (DLOR) 73%

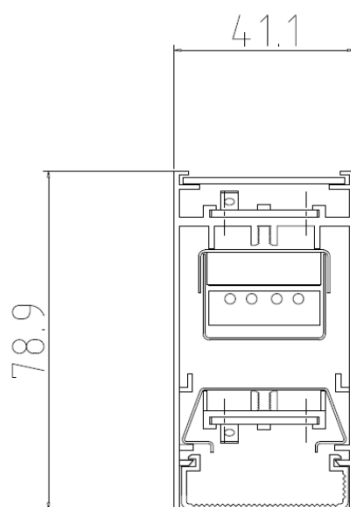

Model Ref / Wattage / Lumen package / Colour temp

SL38S.580.1BH.840.X.OP	11.4W	1740lm	4000K
SL38S.860.1.5BH.840.X.OP	17.1W	2610lm	4000K
SL38S.1140.2BH.840.X.OP	22.8W	3480lm	4000K
SL38S.1420.2.5BH.840.X.OP	28.5W	4350lm	4000K
SL38S.1700.3BH.840.X.OP	34.2W	5220lm	4000K
SL38S.1980.3.5BH.840.X.OP	39.9W	6090lm	4000K
SL38S.2260.4BH.840.X.OP	45.6W	6960lm	4000K
SL38S.2540.4.5BH.840.X.OP	51.3W	7830lm	4000K
SL38S.2820.5BH.840.X.OP	57.0W	8700lm	4000K
SL38S.3110.5.5BH.2T.840.X.OP	62.7W	9570lm	4000K
SL38S.3390.6BH.2T.840.X.OP	68.4W	10440lm	4000K

X Denotes operating driver - ELEC / DSI / DALI

* Above data quoted is for the Helvar LS-Series board, run at 250mA.

** Shorter boards available upon request

*** IP rating can be improved upon request

Data for 350mA and 450mA in 3000K and 4000K is available upon request.

