

Overview:

The SL50UD direct indirect slotlight range is available in various lengths that can be connected to form a highly versatile system, corners and 'T' sections can be incorporated.

Range:

The luminaire system can be used to create one continuous line of direct and indirect light.

Infill sections are available in lengths and colours to suit your individual requirements.

Powered by Tridonic or Harvard light engines.

Provided with a TPA rated high output satine optic, sealed to IP40.

Dimming option.

Emergency option.

Two colour temps: 3000K & 4000K

Two optic options: OP68 (Satine) & UGMP (UGR Optimised micro prism)



Mounting:

Suspended - Provided with 2 metre wire suspensions as standard.

Construction:


Extruded aluminium

Controls:

Electronic	- ELEC
DSI	- DSI
DALI	- DALI

Efficiency:

Optical efficiency (DLOR)	73%
---------------------------	-----

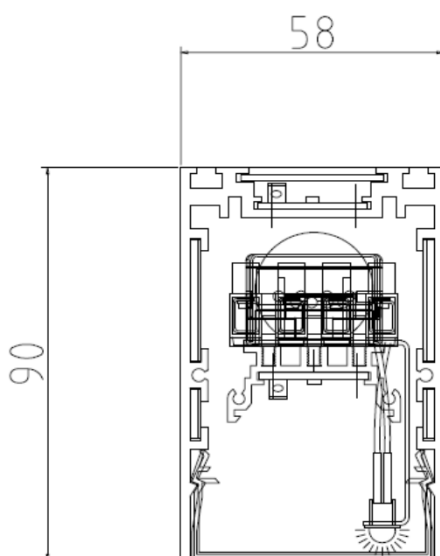

Model Ref / Wattage / Lumen package / Colour temp

Model Ref	Wattage	Lumen package	Colour temp
SL50UD.580.1BH.840.X.OP	10.5W	1660lm	4000K
SL50UD.860.1.5BH.840.X.OP	15.7W	2490lm	4000K
SL50UD.1140.2BH.840.X.OP	21.0W	3320lm	4000K
SL50UD.1420.2.5BH.840.X.OP	26.2W	5810lm	4000K
SL50UD.1700.3BH.840.X.OP	31.5W	4980lm	4000K
SL50UD.1980.3.5BH.840.X.OP	36.7W	5810lm	4000K
SL50UD.2260.4BH.840.X.OP	42.0W	6640lm	4000K
SL50UD.2540.4.5BH.840.X.OP	47.2W	7470lm	4000K
SL50UD.2820.5BH.840.X.OP	52.5W	8300lm	4000K
SL50UD.3110.5.5BH.2T.840.X.OP	57.7W	9130lm	4000K
SL50UD.3390.6BH.2T.840.X.OP	63.0W	9960lm	4000K

X Denotes operating driver - ELEC / DSI / DALI

* Above data quoted is for the Tridonic LLE Advanced board, at 450mA, direct light only.
Indirect lighting data available upon request.

** Shorter boards available upon request

*** IP rating can be improved upon request

NEW UGR 19 OPTIC AVAILABLE FROM AUGUST 2016

Data for 350mA and 400mA in 3000K and 4000K is available upon request. Wattages quoted do not include any losses from the driver